



PRODUCT SPECIFICATIONS

S-BAND ESA



Specifications	
S-Band Electronic Steerable Antenna	
FREQUENCY (MHZ)	2200 - 2500 MHz
POLARIZATION	V + H
GAIN (PEAK)	12 dBi
AZIMUTH BW (NOMINAL)	52°
ELEVATION BW (NOMINAL)	22°
VSWR	2.0:1 Typical (2.5:1 Max)
AVAILABLE BEAM MODES	Single or Multibeam Mode
RF POWER INPUT (MAX)	5W
Physical Specifications	
DIMENSIONS	14.6" x 17" (371mm x 432mm)
WEIGHT	25 lbs (11.3kg)
ENVIRONMENTAL	IP66 / Operating:-40 to 60°C / Storage:-40 to 70°C
POWER	24VDC PoE
CONNECTORS	RF: 2x N-Type
	INTERFACE: 1x RJ-45
MOUNTING	Multiple Mounting Options Available

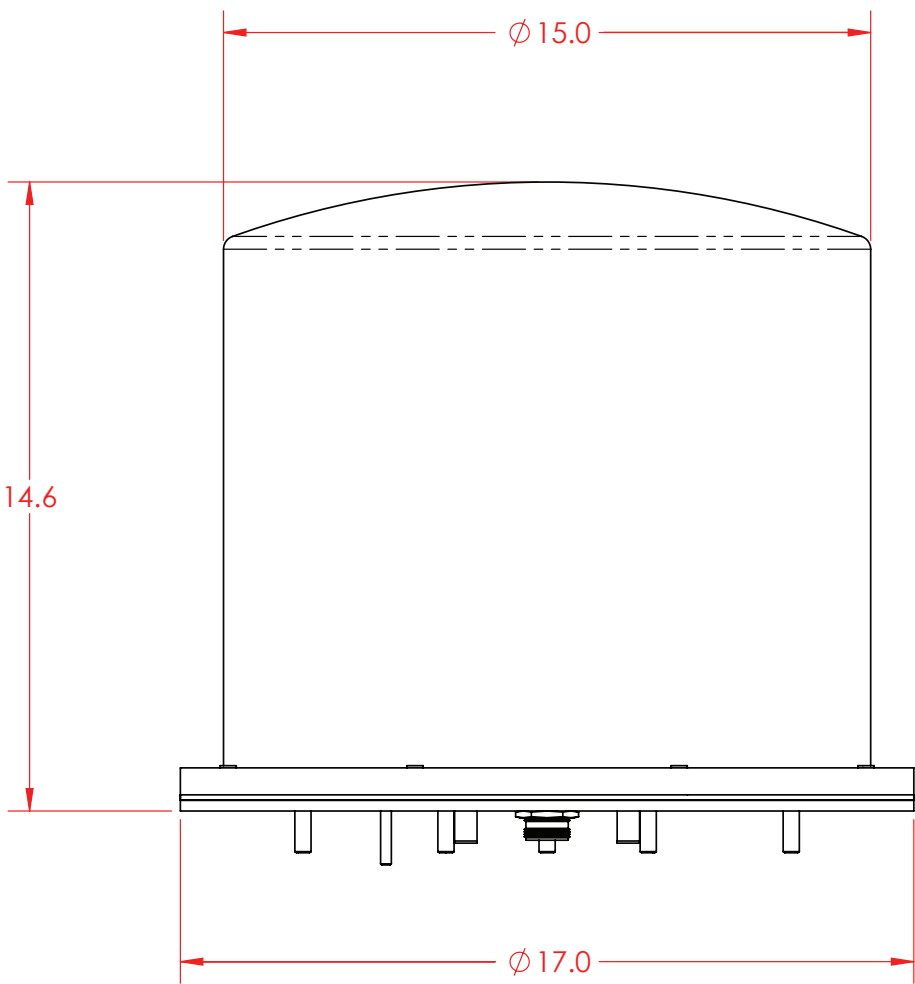

[www.batswireless.com](http://www.batswireless.com)  
8431 Georgetown, Ste. 600  
Indianapolis, Indiana 46268

Military Sales & Inquiries

Sales +1-888-955-8228 x105  
Support +1-317-500-4506  
Email [mil.sales@batswireless.com](mailto:mil.sales@batswireless.com)